

VTO1220A

Apartment Outdoor Station



Technical Specification	
Model	VTO1220A
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Image Sensor	1/3" 1.3MP CMOS
Lens	3.6mm
Angle of View	D:95° H:75°
Day/Night	Color Image
Audio	
Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	3.5" TFT 320x240
Operation Mode	
Keypad	Mechanical Button
Reader	Mifare Card
Approaching Induction	
Body approaching	1m
Interface	
Door Control	1

Features

- HD CMOS camera
- · Aluminum panel, IP54
- · Night vision & Voice indication
- $\cdot \ \text{Local card openning}$
- · Video & Audio messaging
- · Flush mounted



Alarm In

Weight










2(1ch unlock button, 1ch feedback)




Aldillilli	2(1011 dillock button, 1011 leedback)
RS485	1
Network	
Ethernet	10M/100Mbps
Network Protocol	TCP/IP
General	
Ingress Protection	IP54
Tamper Switch	1
Installation	Flush
Material	Aluminum
Power	DC 12V
Power Consumption	Standby ≤1W, Work ≤10W
Working Temperature	-40°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	151.0mm×376.0mm×59.1mm

1.6Kg

Dimensions View Area



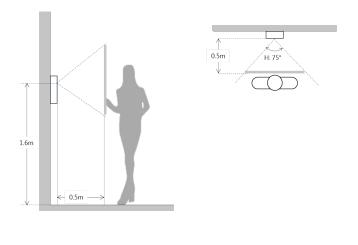

Application



